


Digital Full Colour Multi Function Device

RICOH MP C2003SP MP C2503SP

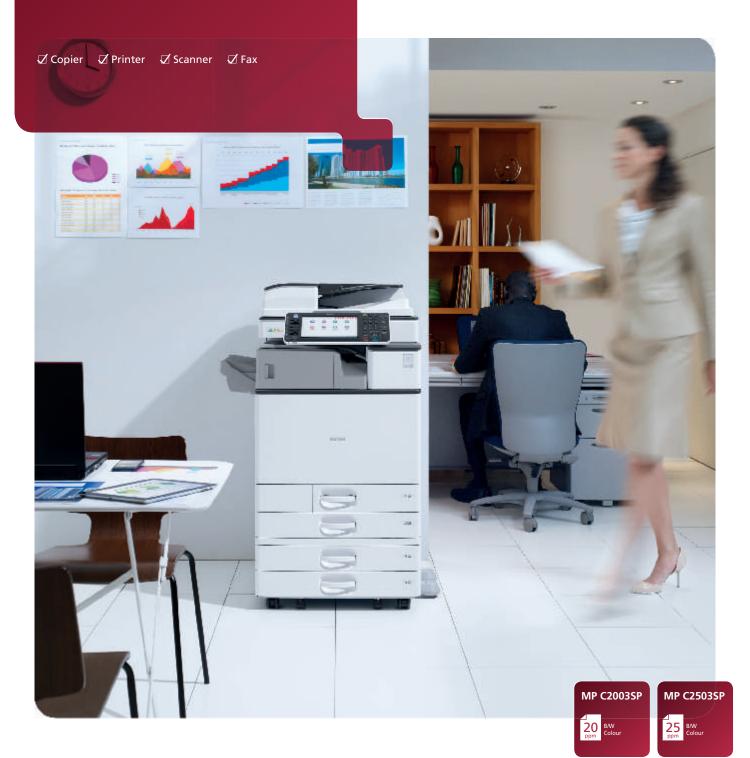

Increase your productivity and lower your environmental impact

Allow a fresh blast of productivity to sweep through your office with Ricoh's new-generation flagship A3 colour MFD. Improve your workflow with its internal finisher, stapleless stapler and smart card reader. Save time with its short warm-up, fast first print speed, ID Card Copy and Searchable PDF. At the same time, reduce your environmental impact through a low power consumption, quota setting and adjustable power on/off settings. In short, the MP C2003SP/MP C2503SP will meet all your digital workflow needs and help you become more productive in an environmentally responsible manner.

- Short warm-up time and fast first print speed
- Innovative touch and swipe operation panel
- Advanced controller for powerful performance
- Supreme image quality
- Unique stapleless stapler

Handle a wide range of media

RICOH MP C2003SP/ MP C2503SP support the increasingly popular SRA3 format, so you can print crop marks for easy and efficient proofing. During simplex operation, the devices take paper of weights up to 300 g/m² for simplex and up to 169 g/m² for duplex. Also, printing on envelopes is easy with a standard envelope feeder available from the second tray.

Scan and share more types of documents

With RICOH MP C2003SP/MP C2503SP, you can scan colour or B&W originals to shared folders, USB/SD cards and other locations to share with anyone, anywhere. It includes Distributed Scan Management (DSM) to automate many scanning functions and to create a set of rules for user permissions, file types and more. Also, it offers an optional embedded OCR scanning feature so you can create searchable and editable PDF files for advanced indexing and retrieval of your scanned documents.



Fully featured MFD designed for you and your budget



- Easily handle multi-page, multi-sized originals and one- and two-sided documents up to 11" x 17" using the optional 100-Sheet Automatic Reversing Document Feeder.
- 2 Minimise paper replenishment time with two standard front-loading Paper Trays that hold 550 sheets each. A standard Bypass Tray holds an additional 100 sheets. All three trays accept multiple paper types and weights. Tray two and the Bypass Tray accommodate envelopes for in-house printing and a wide variety of mailing applications.
- Choose the **optional 2 x 550-sheet Paper Bank**, which boosts paper capacity to 2,300 sheets, to accommodate paper sizes up to 12" x 18" and SRA3.
- Create professionally finished documents completely in-house and save floor space with the optional 500-sheet Internal Finisher with optional 2 & 3-hole punching.

- 5 Bind up to five sheets of paper with no staples using Ricoh's new and exclusive Stapleless Stapler Finisher option. This unique technology helps lower supplies cost, free up document storage space and expedite future paper shredding needs.
- 6 The optional 125-sheet Inner One-Bin Tray keeps documents well organised and easily accessible with its ability to separate print, copy and fax output.
- 7 A helpful and highly intuitive full-colour, tiltable 9" Control Panel features animated graphics to simplify a wide range of jobs. A customisable home screen helps users navigate to commonly performed jobs.
- Easily print from or scan to portable media using the standard USB/ SD card slot located conveniently on the side of the control panel. Print TIFF, PDF or JPEG files from the removable media.

RICOH MP C2003SP/MP C2503SP

MAIN SPECIFICATIONS

GENERAL		FAX (OPTION)		Compatible with	
Warm-up time: First output time: Continuous output speed:	19/19 seconds Full colour: 7.6/7.5 seconds B/W: 5.4/5.3 seconds Fullcolour:20/25 ppm	Circuit: Compatibility: Resolution:	PSTN, PBX ITU-T (CCITT) G3 Standard: 8 x 3.85 line/mm, 200 x 100 dpi, 8 x 7.7 line/mm,	Windows ⁷	Adobe [®] PostScript [®] 3 ^{°°}
Memory:	B/W:20/25 ppm Standard: 1.5 GB Maximum: 2 GB (Optional) HDD: 250 GB	Transmission speed:	200 x 200 dpi Option: 8 x 15.4 line/mm, 16 x 15.4 line/mm, 400 x 400 dpi G3: 2 second(s)	Adobe: PDF	6
Dimensions(WxDxH): Weight: Power source:	587 x 685 x 788 mm (excluding ARDF) 81kg 220–240V,50/60Hz	Modem speed: Memory capacity:	Maximum: 33.6 Kbps Standard: 4 MB Maximum: 28 MB	Wi Fi certified	lava
PRINTER		PAPER HANDLING			POWERED
Printer language: Option: Resolution:	Standard: PCL5c,PCL6,PDF direct print, Media print (JPEG/TIFF) Adobe ®PostScript® 3™, IPDS PictBridge Maximum:1200 x 1200 dpi	Recommended paper size: Paper input capacity:	SRA3, A3, A4, A5, A6, B4, B5, B6 Standard: 1,200 sheets (550 x 2 trays + 100-sheet Bypass) Maximum: 2,300 sheets	🌈 PictBridge	energy gy
Option:	Standard: USB 2.0, SD slot, Ethernet 10 base-T/100 base-TX, Ethernet1000 Base-T Bi-directional IEEE1284, Wireless LAN	Paper output capacity: Paper weight:	Maximum: 625 sheets Paper tray(s): 60-300 g/m ² Bypass tray: 52-300 g/m ² Duplex unit: 52-169 g/m ²	@Remote	🛞 Bluetooth
Network protocol:	(IEEE 802.11a/b/g/n), Bluetooth Standard: TCP/IP (IPv4, IPv6) Optional: IPX/SPX	ECOLOGY	Duplex unit. 32-169 g/m	Embedded Software Architectu	epear
Windows® environments: Mac OS environments:	Windows [®] XP, Windows [®] Vista Windows [®] 7, Windows [®] Server 2003, Windows [®] Server 2003R2, Windows [®] Server 2008, Windows [®] Server 2008R2, Windows [®] Server 2012 Mac OS X Native: v.10.5 or later	Power consumption:	Maximum: 1,700 W Ready mode: 240 W Sleep mode: 0.57/0.58 W TEC (Typical Electricity Consumption): 701/889 W/h	Empedded Jortware Artmitett	
UNIX environments:	UNIX Sun [®] Solaris, HP-UX, SCO OpenServer, RedHat [®] Linux Enterprise, IBM [®] AIX	SOFTWARE		ISO 9001: 2000 certified ISO 14001 certified	
Novell [®] Netware [®] environments: SAP [®] R/3 [®] environments:	v6.5 SAP® R/3®	Standard: Optional:	SmartDeviceMonitor, Web SmartDeviceMoniltor®, Web Image Monitor GlobalScan NX, Card	Ricoh has designed these products to meet EC ENERGY STAR quidelines for energy	
SCANNER		Optional.	Authentication Package, Unicode Front Package for SAP,	efficiency.	
Scanning speed: Resolution:	Full colour/B&W: Maximum 54 ipm Standard: 600 dpi Maximum: 1,200 dpi (TWAIN)	Remote Communication Gate S Pro		All brand and/or product names are trademarks of their respective owners.	
File format:	TIFF, JPEG, PDF, High compression PDF, PDF-A		F, 2 x 550-sheet paper tray, SRA3	Specifications	and external
Bundled drivers: Scan to:	Network TWAIN, Email: SMTP, POP, IMAP4 Folder: SMB, FTP, NCP	extension unit, One-bin tray, Ir finisher, Internal staple-free st Smart operation panel, Memo Fax connection unit, Fax memo Netware, IPDS, Browser unit, P	appearance are subject to change without notice. The colour of the actual product may vary from the colour shown in the brochure.		
COPIER			ecurity unit, File format converter, 84, Counter interface, Key counter	The images in	this brochure are
Copying process: Multiple copying: Resolution: Zoom:	Dry Electrostatic Transfer System Up to 999 copies 600 dpi From 25 to 400% in 1% steps	bracket, Card reader converter For availability of models, opti consult your local Ricoh repres	The images in this brochure are not real photographs and slight differences in detail might appear.		



URL: http://www.ricoh.co.in

RICOH INDIA LIMITED

CORPORATE OFFICE: 2nd Floor, Salcon Aurum Building, Plot No. 4, District Centre, Jasola, New Delhi-110 025 Tel: (011) 49103000, 49103100, 49103200 Fax: (011) 49103099, 49103199 Email: ril.info@ricoh.co.in SMS: 'RICOH' to 53456 REGISTERED OFFICE: 1201, 1st Floor, Building No. 12, Solitaire Corporate Park, Andheri-Ghatkopar Link Road, Chakala, Andheri-East, Mumbai - 400 093 Tel: (022) 66833000 Fax: (022) 67032099 Ahmedabad, Bangalore, Bhopal, Bhubaneshwar, Chandigarh, Chennai, Coimbatore, Delhi, Gurgaon, Guwahati, Hyderabad,

Ahmedabad, Bangalore, Bhopal, Bhubaneshwar, Chandigarh, Chennai, Coimbatore, Delhi, Gurgaon, Guwahati, Hyderabad, Jaipur, Kochi, Kolkata, Lucknow, Mumbai, Nagpur, Noida, Patna, Pune, Ranchi, Visakhapatnam.

For more information, please contact: